



passion for sports grounds

SMG Sportplatzmaschinenbau GmbH

Robert-Bosch-Str. 3, DE - 89269 Vöhringen / Germany

Phone: +49 (0) 7306 96 65 0

Fax: +49 (0) 7306 96 65 50

E-mail: info@smg-machines.com



StrukturMatic - Applying / Striping
StrukturMatic S122D



StrukturMatic - Applying / Striping

StrukturMatic S122D



Item number/s:

6400090

Spraying machine for structured spray coatings and primer.

Performance 15 kg/min.

StrukturMatic S122 is able to apply all structural spray coatings, solvent-based, solvent-free and water-based PU-dispersions used in the sports surfaces construction industry. The machine is robustly constructed, extremely agile and easy to manoeuvre. With its swivelling, articulated bracket for the long spray hose it has an impressive action radius.

TurboSpray TS30 spraying pistol, with different material nozzles, is well-suited to handle thick, very compact and coarse-grained materials. Controllable pump pressure and adjustable air quantity reduce the spray vapour and produce a homogeneous spray finish at highest performance. Material throughput: 15 kg/min.

All control elements are ergonomically positioned and easy to operate. Control valves, pressure control and pressure valve are also easily accessible.

StrukturMatic - Applying / Striping

StrukturMatic S122D

Detail views




StrukturMatic S122D



High Performance Cooler

Kubota diesel engine with combination cooler for engine and hydraulic oil temperature.

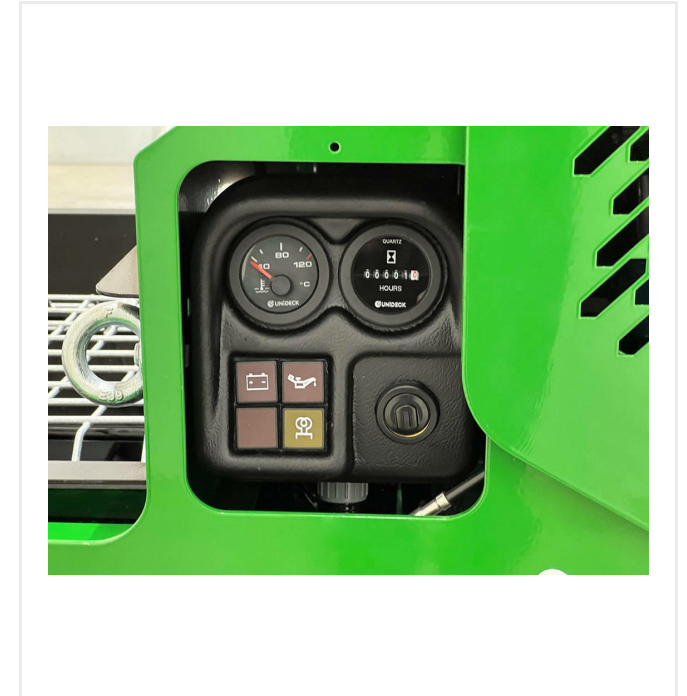

Reliable

Kubota Control Box.

StrukturMatic - Applying / Striping

StrukturMatic S122D

Detail views



Protected


Steering elements integrated in the chassis.



TurboSpray TS30

The spraying pistol TurboSpray TS30 with its different material and air nozzles is well-suited to handle thick, very compact and coarse-grained materials.

With high performance (approx. 15 kg/ min) and precise handling it produces a homogeneous spray finish.



Trusted

Material container and mixing paddle for homogenous spray finish.

StrukturMatic - Applying / Striping

StrukturMatic S122D

Technical information

Main drive	S122 E: electric motor 7,5 kW / 10,2 HP S122 D: diesel engine 14,9 kW / 20,3 HP
Drive	Hydraulic aggregate with tank, pump, control valve, main control block; pump and compressor driven by motor via double V-belts; hydraulic tank capacity 10 litres.
Spraying performance	15 kg/min.
Weight	S122E: 500 kg S122D: 550 kg
Dimensions	L 1,900 x W 950 x H 1,100 mm
Shipping dimensions	L 2,000 x W 1,000 x H 1,200 mm

Subject to technical changes



passion for sports grounds

SMG Sportplatzmaschinenbau GmbH | Robert-Bosch-Str. 3, DE - 89269 Vöhringen / Germany | Phone: +49 (0) 7306 96 65 0
Fax: +49 (0) 7306 96 65 50 | info@smg-machines.com | www.smg-machines.com