



passion for sports grounds



SMG Sportplatzmaschinenbau GmbH | Robert-Bosch-Str. 3, DE - 89269 Vöhringen / Germany | Phone: +49 (0) 7306 96 65 0
Fax: +49 (0) 7306 96 65 50 | info@smg-machines.com | www.smg-machines.com

RotoTine RT1502

ROTOTINE - RECYCLING



Attachment for loosening of artificial turf.
Working width 1,500 mm.

RotoTine RT1502 is designed to loosen the artificial turf infill material. It can also be used to work out the infill from the artificial turf by adjusting the working depth to a lower setting. 4 adjustment spindles allow the adjustment of the working depth to the desired setting. A locking mechanism secures the spindles from turning.

The rotating tools are equipped with tines. If needed, brushes of different configuration and hardness can be used.

Requirements for using the RT1502:

Operation requires a tractor with at least 22 kW (30 HP) drive power and also a 3-point hydraulic hitch. We recommend a continuously variable hydrostatic transmission drive or crawling gear. The PTO must be at 540 rpm.



RotoTine RT1502 / Detail views

ROTOTINE - RECYCLING




RotoTine RT1502



Precision

Adjustment spindle lock mechanism for the working depth.

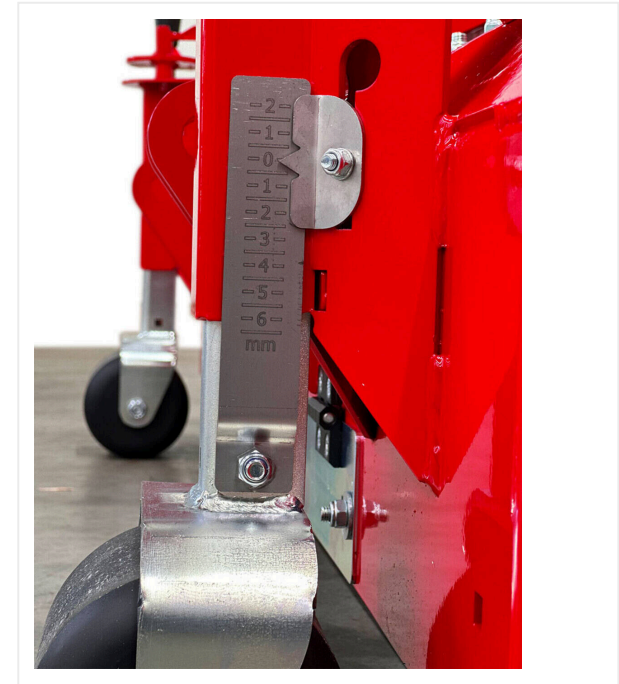


Control

Scale to control the working depth.

RotoTine RT1502 / Detail views

ROTOTINE - RECYCLING

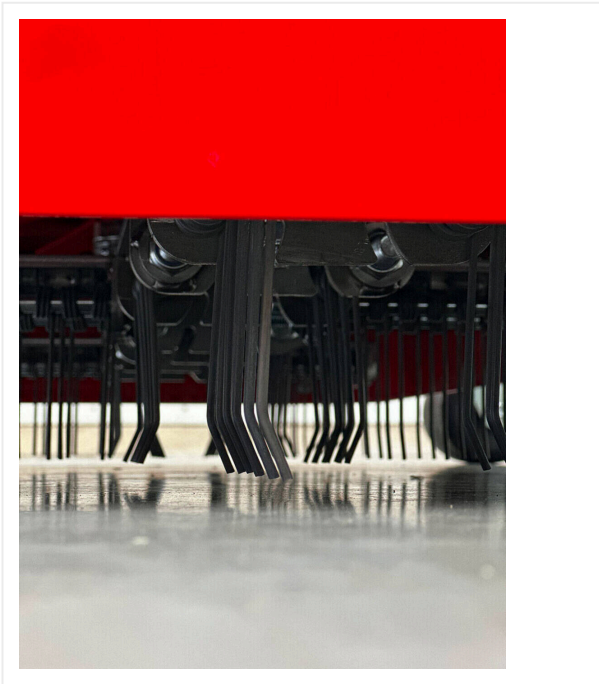

Variable

Brackets for tines and brushes.



Maintenance brush for artificial turf

Brushes of different configuration and hardness.

RotoTine RT1502 / Detail views

ROTOTINE - RECYCLING

Item number/s:	6222544
Working width	1,500 mm
Drive	PTO adaptor, 540 rpm
Weight	420 kg
Dimensions	L 1,645 x W 965 x H 780 mm
Shipping dimensions	L 1,728 x W 1,097 x H 1,010 mm

Subject to technical changes



passion for sports grounds

SMG Sportplatzmaschinenbau GmbH | Robert-Bosch-Str. 3, DE - 89269 Vöhringen / Germany | Phone: +49 (0) 7306 96 65 0

Fax: +49 (0) 7306 96 65 50 | info@smg-machines.com | www.smg-machines.com